

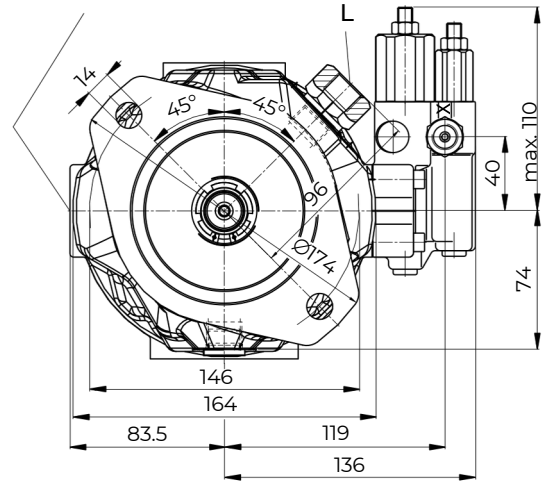



DFR / DFR1 / DRSC – Pressure and flow control, hydraulic; clockwise rotation, version: Ports metric

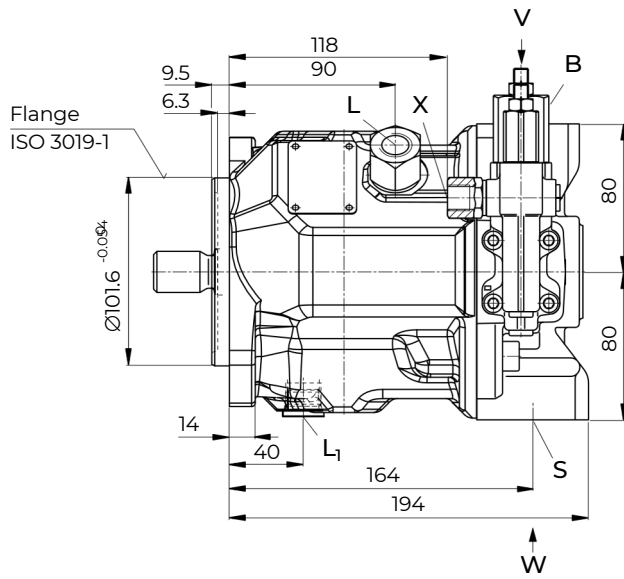


Detail V



Detail W




View Z

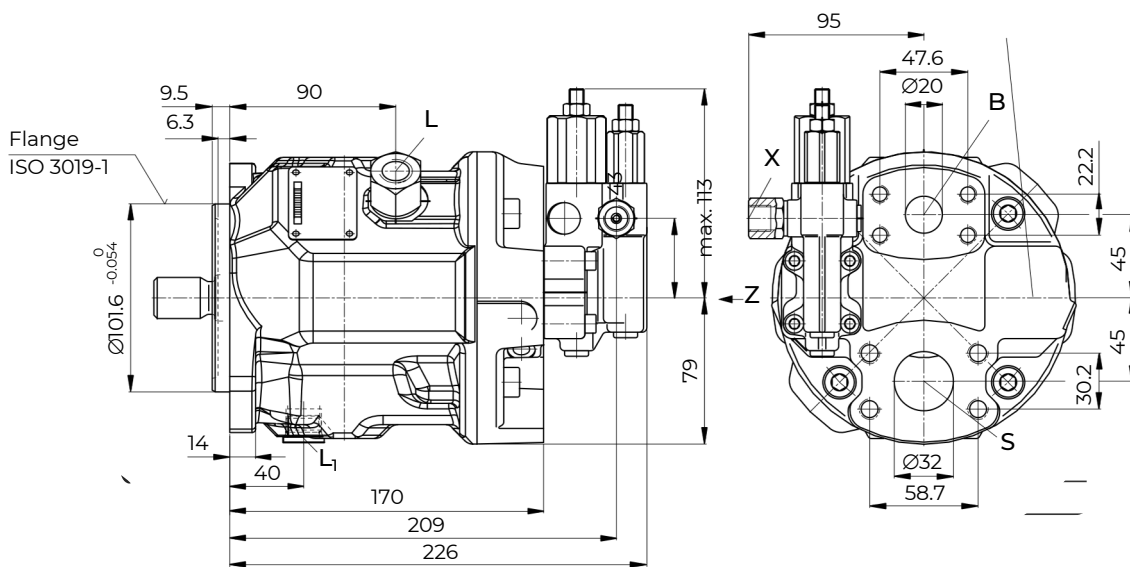





Splined shaft 7/8 in (SAE J744)

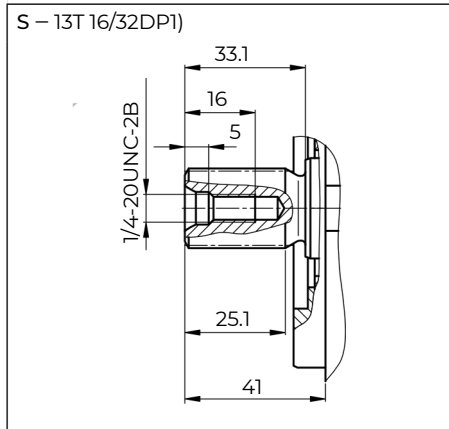



Splined shaft 7/8 in (SAE J744)

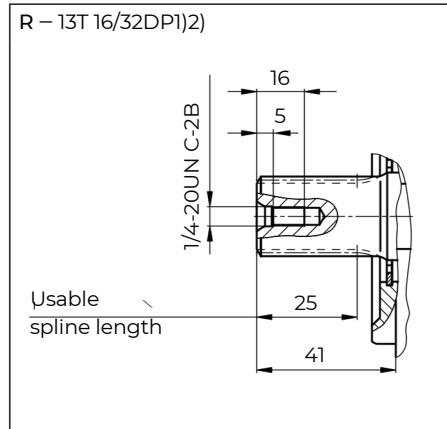

Splined shaft 3/4 in (SAE J744)

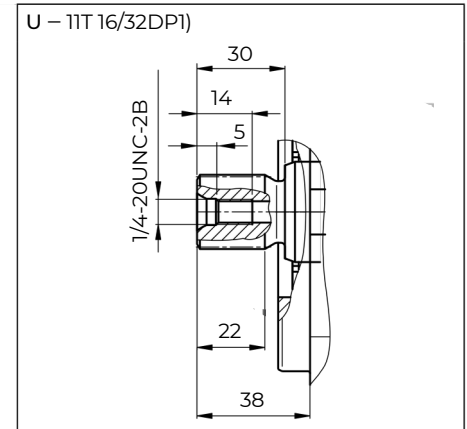

Splined shaft 3/4 in (SAE J744)

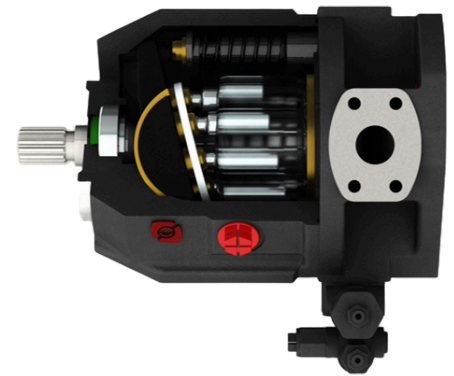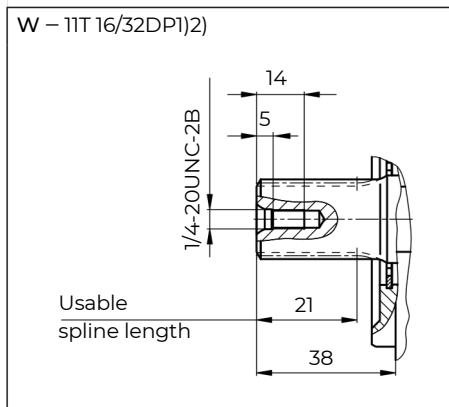

## -Technical Data

Size	NG		18	28	45	71	88	100	140	
<b>Displacement, geometric, per revolution</b>	$V_g \text{ max}$	cm <sup>3</sup>	18	28	45	71	88	100	140	
<b>Rotational speed maximum)</b>	at $V_g \text{ max}$	$n_{nom}$	rpm	3300	3000	2600	2200	2100	2000	1800
	at $V_g < V_g \text{ max}^2)$	$n_{max \text{ perm}}$	rpm	3900	3600	3100	2600	2500	2400	2100
<b>Flow</b>	at $n_{nom}$ and $V_g \text{ max}$	$q_v \text{ max}$	l/min	59	84	117	156	185	200	252
	at $n_E = 1500 \text{ rpm}$ and $V_g \text{ max}$	$q_{vE} \text{ max}$	l/min	27	42	68	107	132	150	210
<b>Power at <math>\Delta p = 280 \text{ bar}</math></b>	at $n_{nom}$ , $V_g \text{ max}$	$P_{max}$	kW	28	39	55	73	86	93	118
	at $n_E = 1500 \text{ rpm}$ and $V_g \text{ max}$	$P_{E \text{ max}}$	kW	12.6	20	32	50	62	70	98
<b>Torque at <math>V_g \text{ max}</math> and</b>	$\Delta p = 280 \text{ bar}$	$T_{max}$	Nm	80	125	200	316	392	445	623
	$\Delta p = 100 \text{ bar}$	$T$	Nm	30	45	72	113	140	159	223
<b>Rotary stiffness of drive shaft</b>	S	$c$	Nm/rad	11087	22317	37500	71884	71884	121142	169437
	R	$c$	Nm/rad	14850	26360	41025	76545	76545	-	-
	U	$c$	Nm/rad	8090	16695	30077	52779	52779	91093	-
	W	$c$	Nm/rad	-	19898	34463	57460	57460	101847	165594
<b>Moment of inertia for rotary group</b>	$J_{rw}$	kgm <sup>2</sup>	0.00093	0.0017	0.0033	0.0083	0.0083	0.0167	0.0242	
<b>Maximum angular acceleration)</b>	$\alpha$	rad/s <sup>2</sup>	6800	5500	4000	2900	2600	2400	2000	
<b>Case volume</b>	$V$	l	0.4	0.7	1.0	1.6	1.6	2.2	3.0	
<b>Weight without through drive (approx.)</b>	$m$	kg	12.9	18	23.5	35.2	35.2	49.5	65.4	
<b>Weight with through drive (approx.)</b>			13.8	19.3	25.1	38	38	55.4	74.4	

01	02	03	04	05	06	07	08	09	10	11	12	13			
	A10V(S)	O			/	31		-	V						
<b>Version</b>									<b>18</b>	<b>28</b>	<b>45</b>	<b>71</b>	<b>88</b>	<b>100</b>	<b>140</b>
01	Standard version (without code)							•	•	•	•	•	•		
	High-speed version (external dimensions are the same as the standard version)							-	-	•	•	-	•	•	H
<b>Axial piston unit</b>															
02	Swashplate design, variable, nominal pressure 280 bar, maximum pressure 350 bar							•	-	-	-	-	-	-	A10VS
								-	•	•	•	•	•	•	A10V
<b>Operating mode</b>															
03	Pump, open circuit											O			
<b>Size (NG)</b>															
04	Geometric displacement, see table of values on pages 6 and 7							18	28	45	71	88	100	140	
<b>Control device</b>															
05	Two-point control, direct operated							•	•	•	•	•	•	•	DG
	Pressure controller	hydraulic					•	•	•	•	•	•	•	•	DR
	with flow controller	hydraulic	X-T open				•	•	•	•	•	•	•	•	DFR
			X-T plugged with flushing function				•	•	•	•	•	•	•	•	DFR1
			X-T plugged without flushing function				•	•	•	•	•	•	•	•	DRSC
	with flow and differential pressure control, electrically variable							•	•	•	•	•	•	•	EF <sup>1)</sup>
	with pressure cut-off	hydraulic	remote controlled				•	•	•	•	•	•	•	•	DRG
			electrical	negative control	U = 12 V		•	•	•	•	•	•	•	•	•
		U = 24 V			•	•	•	•	•	•	•	•	•	•	ED72
		electrical	positive control	U = 12 V		•	•	•	•	•	•	•	•	•	ER71
				U = 24 V		•	•	•	•	•	•	•	•	•	•
	Pressure-flow power control							-	•	•	•	•	•	•	DFLR
<b>Series</b>															
06	Series 3, index 1											31			
<b>Direction of rotation</b>															
07	Viewed on drive shaft					clockwise						R			
						counter-clockwise						L			
<b>Sealing material</b>															
08	FKM (fluoroelastomer)											V			
<b>Drive shaft</b>															
09	Splined shaft ANSI B92.1a	standard shaft					•	•	•	•	•	•	•	•	S
		similar to shaft "S" however for higher input torque					•	•	•	•	•	-	-	•	R
		reduced diameter, limited suitability for through drive (see table of values, page 9)					•	•	•	•	•	•	○	•	U
		same as "U", higher torque; limited suitability for through drive (see table of values, page 9)					-	•	•	•	•	•	•	•	W
<b>Mounting flange</b>															
10	ISO 3019-1 (SAE)					2-hole		•	•	•	•	•	•	•	S
						4-hole		•	•	•	•	•	-	-	R

01	02	03	04	05	06	07	08	09	10	11	12	13
	<b>A10V(S)</b>	<b>O</b>			<b>/</b>	<b>31</b>		<b>-</b>	<b>V</b>			

### Working port

				18	28	45	71	88	100	140	
<b>11</b>	SAE flange ports according to J518 Working ports metric	Fastening thread metric; rear	not for through drive	-	•	•	-	-	•	•	<b>11</b>
				-	-	-	•	•	-	-	<b>41</b>
		Fastening thread metric; lateral top bottom	for through drive	•	•	•	-	-	•	•	<b>12</b>
				-	-	-	•	•	-	-	<b>42</b>
	SAE flange ports according to J518 Working ports UNF	Fastening thread UNF; rear	not for through drive	-	•	•	-	-	•	•	<b>61</b>
				-	-	-	•	•	-	-	<b>91</b>
Fastening thread UNF; lateral top bottom		for through drive	•	•	•	-	-	•	•	<b>62</b>	
			-	-	-	•	•	-	-	<b>92</b>	

### Through drive

			18	28	45	71	88	100	140	
<b>12</b>	Flange ISO 3019-1 Diameter	Hub for splined shaft Diameter								
	without through drive		•	•	•	•	•	•	•	<b>N00</b>
	82-2 (A)	5/8 in	9T 16/32DP	•	•	•	•	•	•	<b>K01</b>
		3/4 in	11T 16/32DP	•	•	•	•	•	•	<b>K52</b>
	101-2 (B)	7/8 in	13T 16/32DP	-	•	•	•	•	•	<b>K68</b>
		1 in	15T 16/32DP	-	-	•	•	•	•	<b>K04</b>
	127-2 (C)	1 1/4 in	14T 12/24DP	-	-	-	•	•	•	<b>K07</b>
		1 1/2 in	17T 12/24DP	-	-	-	-	-	•	<b>K24</b>
	152-4 (D)	1 3/4 in	13T 8/16DP	-	-	-	-	-	•	<b>K17</b>

• = Available    ◦ = On request    - = Not available