



DR – Hydraulic pressure controller, clockwise rotation, 53

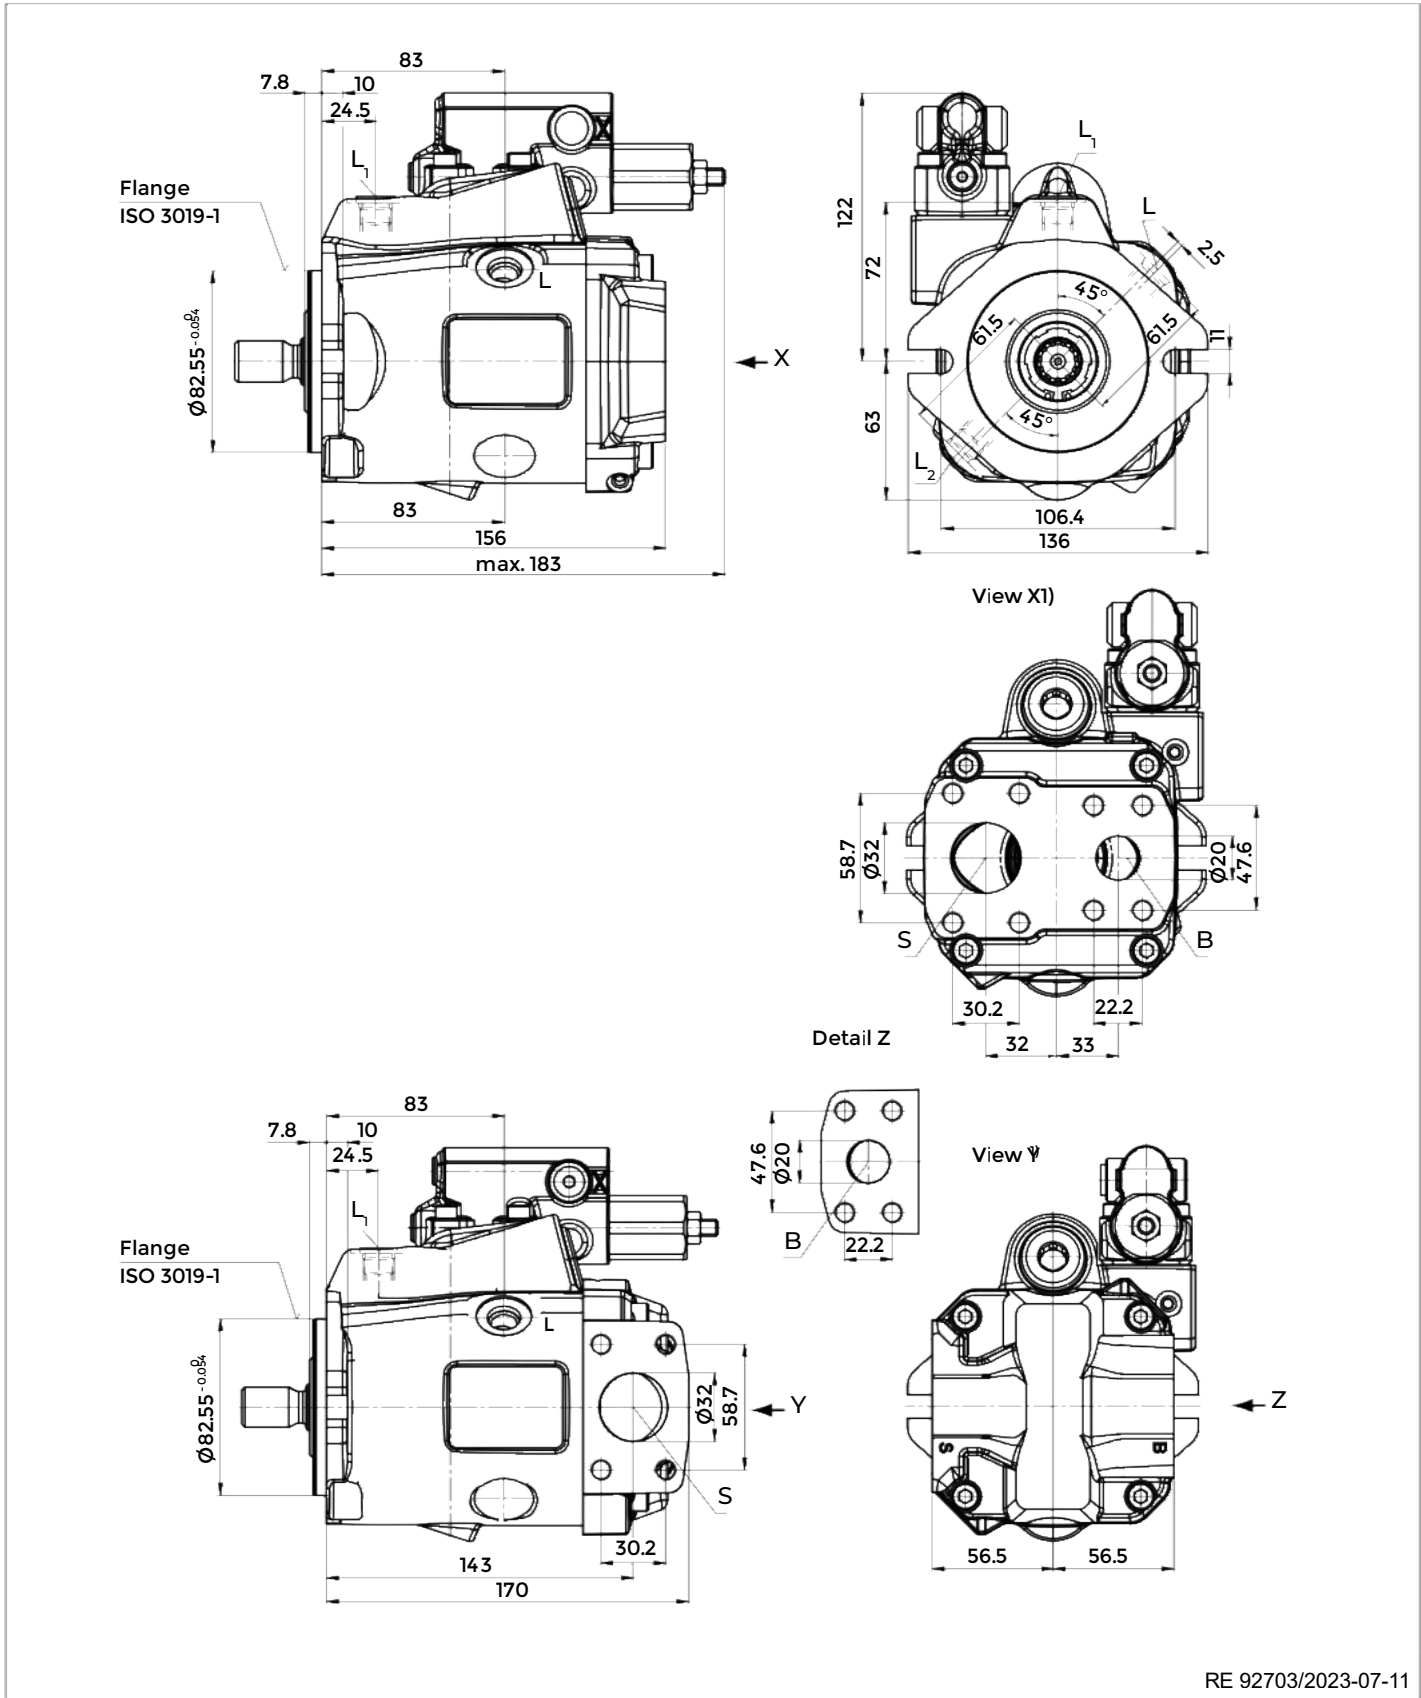


▼ Splined shaft 3/4 in (SAE J744)

S – 11T 16/32DP1)

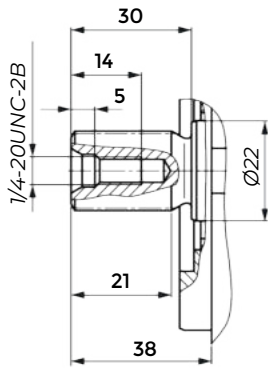


▼ Splined shaft 3/4 in (SAE J744)

R – 11T 16/32DP1)2)

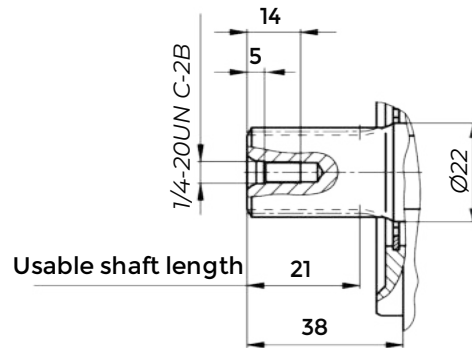

▼ Splined shaft 5/8 in (SAE J744)

U – 9T 16/32DP1)

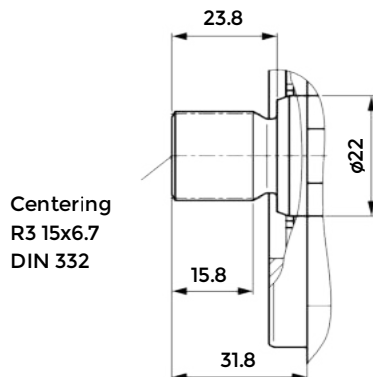

-Technical Data

Size		NG	10	18	28	45	60	63	72	85	100	
Displacement, geometric, per revolution		$V_g \text{ max}$	cm ³	10.5	18	28	45	60	63	72	85	100
Speed maximum	at $V_g \text{ max}$	n_{nom}	rpm	3600	3300	3000	2600	2700	2600	2600	2500	2300
	at $V_g < V_g \text{ max}$	$n_{max \text{ perm}}$	rpm	4320	3960	3600	3120	3140	3140	3140	3000	2500
Flow	at n_{nom} and $V_g \text{ max}$	$q_v \text{ max}$	l/min	37	59	84	117	162	163	187	212	230
	at $n_E = 1500 \text{ rpm}$	$q_{VE} \text{ max}$	l/min	15	27	42	68	90	95	108	128	150
Power	at n_{nom} , $V_g \text{ max}$ $\Delta p = 250 \text{ bar}$	P_{max}	kW	16	25	35	49	65	68	77	89	96
	at $n_E = 1500 \text{ rpm}$	$P_{E \text{ max}}$	kW	7	11	18	28	37	39	45	53	62
Torque	at $V_g \text{ max}$ $\Delta p = 250 \text{ bar}$	T_{max}	Nm	42	71	111	179	238	250	286	338	398
	at $V_g \text{ max}$ $\Delta p = 100 \text{ bar}$	T	Nm	17	29	45	72	95	100	114	135	159
Rotary stiffness of drive shaft	S	c	Nm/rad	9200	11000	22300	37500	65500	65500	65500	143000	143000
	R	c	Nm/rad	-	14800	26300	41000	69400	69400	69400	152900	-
	U	c	Nm/rad	6800	8000	16700	30000	49200	49200	49200	102900	102900
	W	c	Nm/rad	-	-	19900	34400	54000	54000	54000	117900	117900
	P	c	Nm/rad	10700	-	-	-	-	-	-	-	-
Moment of inertia for rotary group		J_{rw}	kgm ²	0.0006	0.0009	0.0017	0.003	0.0056	0.0056	0.0056	0.012	0.012
Maximum angular acceleration		α	rad/s ²	8000	6800	5500	4000	3300	3300	3300	2700	2700
Case volume		V'	l	0.2	0.25	0.3	0.5	0.8	0.8	0.8	1	1
Weight without through drive (approx.)		m	kg	8	11.5	15	18	22	22	22	36	36
Weight with through drive (approx.)				-	13	18	24	28	28	28	45	45

01	02	03	04	05	06	07	08	09	10	11	12	13
A10V	O			/	53		-		V			

Axial piston unit
18 28 45 63 72 85 100

01	Swashplate design, variable, nominal pressure 250 bar, maximum pressure 315 bar			-	•	•	•	•				A10V
-----------	---	--	--	---	---	---	---	---	--	--	--	-------------

Operation mode

02	Pump, open circuit											O
-----------	--------------------	--	--	--	--	--	--	--	--	--	--	----------

Size (NG)

03	Geometric displacement, see table of values on page 10	18	28	45	63	72	85	100
-----------	--	-----------	-----------	-----------	-----------	-----------	-----------	------------

Control devices

04	Pressure controller	hydraulic			•	•	•	•	•	•	•	DR		
	with flow controller	hydraulic	X-T open		•	•	•	•	•	•	•	•	DRF	
			X-T plugged with flushing function		•	•	•	•	•	•	•	•	DRS	
			X-T plugged without flushing function		•	•	•	•	•	•	•	•	•	DRSC
			with pressure cut-off	hydraulic	remotely operated		•	•	•	•	•	•	•	DRG
	with pressure cut-off	electric	negative control	U = 12 V		-	•	-	•	•	•	•	ED71	
				U = 24 V		-	•	-	•	•	•	•	ED72	
		electric	positive control	U = 12 V		-	•	-	•	•	•	•	ER71	
				U = 24 V		-	•	-	•	•	•	•	ER72	
	Pressure-flow power control		electric control (negative control)		○	○	○	○	○	•	•	EF..		
	Power control with pressure cut-off	hydraulic	start of control from	10 to 35 bar		•	•	•	•	•	•	•	LA5D	
				36 to 70 bar		•	•	•	•	•	•	•	LA6D	
				71 to 105 bar		•	•	•	•	•	•	•	LA7D	
				106 to 140 bar		•	•	•	•	•	•	•	LA8D	
				141 to 230 bar		•	•	•	•	•	•	•	•	LA9D
	remotely operated	hydraulic	start of control	see LA.D		•	•	•	•	•	•	LA.DG		
	flow control, X-T plugged	hydraulic	start of control	see LA.D		•	•	•	•	•	•	•	LA.DS	
		electrically overridable (negative control)	start of control	see LA.D		•	•	•	•	•	•	•	LA.S	
	Electro-proportional control		positive control											
	with pressure control			U = 12 V		•	•	•	•	•	•	•	EP1D	
U = 24 V					•	•	•	•	•	•	•	EP2D		
with pressure and flow control (load-sensing)		X-T open	U = 12 V		•	•	•	•	•	•	•	EP1DF		
			U = 24 V		•	•	•	•	•	•	•	EP2DF		
with pressure and flow control (load-sensing)		X-T plugged	U = 12 V		•	•	•	•	•	•	•	EP1DS		
			U = 24 V		•	•	•	•	•	•	•	EP2DS		
with electro-hydraulic pressure control			U = 12 V		•	•	•	•	•	•	•	EP1ED		
			U = 24 V		•	•	•	•	•	•	•	EP2ED		

01	02	03	04	05	06	07	08	09	10	11	12	13
A10V	O		/	53	-		V					

Control devices

18 28 45 63 72 85 100

04	Electro-proportional control	positive control										
	with pressure control		U = 12 V	•	•	•	•	•	•	•	•	EK1D
			U = 24 V	•	•	•	•	•	•	•	•	EK2D
	with pressure and flow control (load-sensing)	X-T open	U = 12 V	•	•	•	•	•	•	•	•	EK1DF
			U = 24 V	•	•	•	•	•	•	•	•	EP2DF
	with pressure and flow control (load-sensing)	X-T plugged	U = 12 V	•	•	•	•	•	•	•	•	EP1DS
			U = 24 V	•	•	•	•	•	•	•	•	EP2DS
	electro-hydraulic pressure control with controller cut-off		U = 12 V	•	•	•	•	•	•	•	•	EP1ED
U = 24 V			•	•	•	•	•	•	•	•	EP2ED	

Series

05	Series 5, index 3	•	•	•	•	•	•	•	•	•	•	53
----	-------------------	---	---	---	---	---	---	---	---	---	---	----

Direction of rotation

06	View on drive shaft	clockwise										R
		counter-clockwise										L

Sealing material

07	FKM (fluor-caoutchouc)											V
----	------------------------	--	--	--	--	--	--	--	--	--	--	---

Drive shaft

08	Splined shaft ANSI B92.1a	standard shaft	•	•	•	•	•	•	•	•	•	S	
		similar to shaft "S" however for higher input torque	•	•	•	•	•	•	•	•	•	R	
		reduced diameter, limited suitability for through drive	•	•	•	•	•	•	•	•	•	•	U
		similar to shaft "U", however for higher torque	-	•	•	•	•	•	•	•	•	•	W

Mounting flange

09	ISO 3019-1 (SAE)	2-hole	•	•	•	•	•	•	•	•	•	C
		4-hole	-	-	-	•	•	•	•	•	•	D

Working port

10	SAE flange port fastening thread, metric	rear	not for through drive	•	•	•	•	•	•	•	•	11
		at side, opposite	for through drive	•	•	•	•	•	•	•	•	12
		at side, offset 90°	not for through drive; available only for counter-clockwise direction of rotation	-	-	•	-	-	-	-	-	-

01	02	03	04	05	06	07	08	09	10	11	12	13
A10V	O			/	53		-	V				

Through drive

11	Flange ISO 3019-1 Diameter	Hub for splined shaft Diameter	18	28	45	63	72	85	100	
			without through drive	•	•	•	•	•	•	
82-2 (A)	5/8 in	9T 16/32DP	•	•	•	•	•	•	•	K01
		11T 16/32DP	•	•	•	•	•	•	•	K52
101-2 (B)	7/8 in	13T 16/32DP	-	•	•	•	•	•	•	K68
	1 in	15T 16/32DP	-	-	•	•	•	•	•	K04
127-4 (C)	1 1/4 in	14T 12/24DP	-	-	-	•	•	•	•	K15
	1 1/2 in	17T 12/24DP	-	-	-	-	-	•	•	K16
127-2 (C)	1 1/4 in	14T12/24DP	-	-	-	-	-	•	•	K07
	1 1/2 in	17T 12/24DP	-	-	-	-	-	•	•	K24

Connectors for solenoids

12		18	28	45	63	72	85	100	
	Without connector (without solenoid, with hydraulic control only, without code)	•	•	•	•	•	•	•	
	DEUTSCH - molded connector, 2-pin - without suppressor diode (for electric controls)	•	•	•	•	•	•	•	P

• = Available ◦ = On request - = Not available